


# ZXMR-YPLDD132 Series

**HALF-CELL N-Type Bifacial Double Glass  
Monocrystalline PU Composite Framed PV Module**

**620-650W**      **24.06%**      **0.40%**  
**POWER RANGE**      **MAXIMUM EFFICIENCY**      **YEARLY DEGRADATION**

**12** **12 YEARS PRODUCT WARRANTY**      **30** **30 YEARS OUTPUT GUARANTEE**

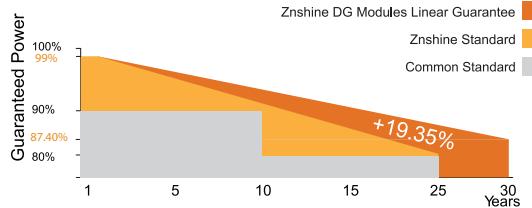

\*Please check the valid version of Limited Product Warranty which is officially released by ZNSHINE PV-TECH Co.,Ltd.



IEC 61215/IEC 61730/IEC 61701/IEC 62716

ISO 14001: Environmental Management System

ISO 9001: Quality Management System

ISO45001: Occupational Health and Safety Management System

\*As there are different certification requirements in different markets, please contact your local Znshine sales representative for the specific certificates applicable to the products in the region in which the products are to be used.

## KEY FEATURES



### Ultra Low Carbon

CO<sub>2</sub> emissions only 10% of the AL frame.



### Better Weak Illumination Response

More power output in weak light condition, such as haze, cloudy, and early morning.



### High Insulation

PU composite frame: no grounding, reduce PID risk, improve safety, maintenance free.



### Corrosion Resistant

Excellent humidity and heat resistance, anti-salt spray corrosion, suitable for offshore PV stations and other highly corrosive fields.



### High Anti PID

PU composite frame, Super Anti-PID performance.



### TIER 1

Global, Tier 1 bankable brand, with independently certified advanced automated manufacturing.



### High Anti-Glare


PU composite frame, Super Anti-Glare performance.




### Natural Black Vision

Solar modules with a PU composite frame have a more uniform appearance and superior aesthetics.

## DIMENSIONS OF PV MODULE(mm)

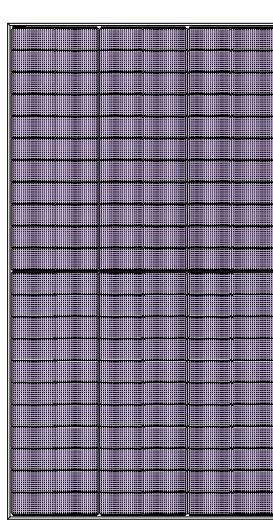


Front View

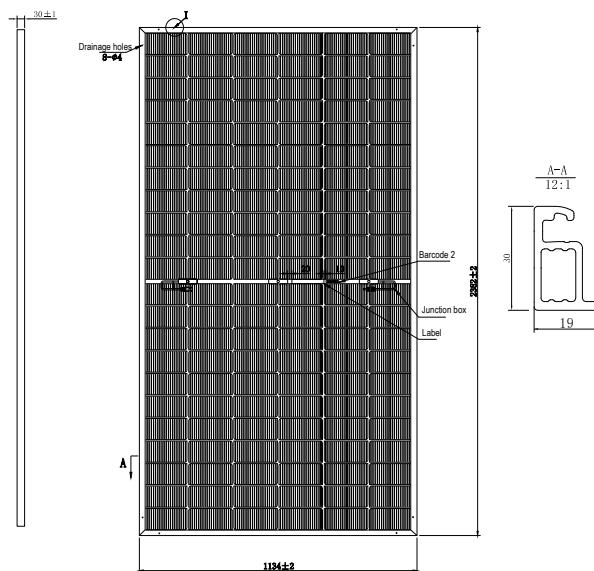


Back View

## I-V CURVES OF PV MODULE(650W)

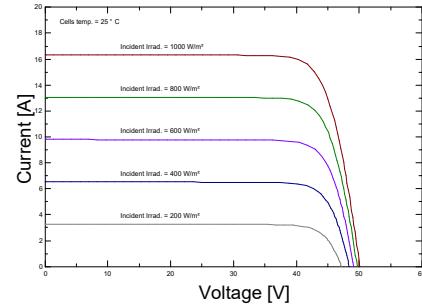

## P-V CURVES OF PV MODULE(650W)

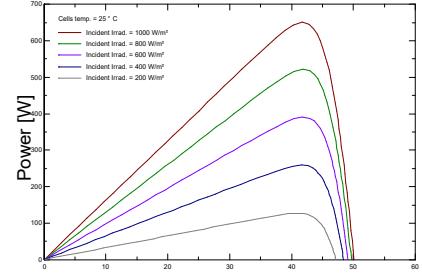

\*Remark: customized frame color and cable length available upon request

## ELECTRICAL CHARACTERISTICS | STC\*

## MECHANICAL DATA

Nominal Power Watt Pmax(W)*	620	625	630	635	640	645	650	Solar cells	N-type Monocrystalline, Rectangular cells
Maximum Power Voltage Vmp(V)	41.00	41.20	41.40	41.60	41.80	42.00	42.20	Cells orientation	132 (6x22)
Maximum Power Current Imp(A)	15.13	15.17	15.22	15.27	15.32	15.36	15.41	Module dimension	2382x1134x30 mm (With Frame)
Open Circuit Voltage Voc(V)	48.90	49.10	49.30	49.50	49.70	49.90	50.10	Weight	33.5±1.0 kg
Short Circuit Current Isc(A)	16.05	16.09	16.14	16.19	16.24	16.29	16.34	Glass	2.0 mm+2.0mm, High Transmission, AR Coated Heat Strengthened Glass
Module Efficiency (%)	22.95	23.14	23.32	23.51	23.69	23.88	24.06	Junction box	IP 68, 3 diodes
								Cables	4 mm², 350 mm (With Connectors)
								Connectors*	MC4-EVO2 compatible

\*Please refer to regional datasheet for specified connector

## ELECTRICAL CHARACTERISTICS | NMOT\*

## TEMPERATURE RATINGS

## WORKING CONDITIONS

Maximum Power Pmax(Wp)	471.30	475.20	478.90	482.70	486.50	490.20	494.00	NMOT	44°C ±2°C	Maximum system voltage	1500 V DC
Maximum Power Voltage Vmpp(V)	38.04	38.50	38.70	38.90	39.10	39.30	39.50	Temperature coefficient of Pmax	(-0.28±0.028)%/°C	Operating temperature	-40°C~+85°C
Maximum Power Current Imp(A)	12.29	12.33	12.37	12.41	12.44	12.48	12.52	Temperature coefficient of Voc	-0.23%/°C	Maximum series fuse	30 A
Open Circuit Voltage Voc(V)	46.30	46.50	46.70	46.90	47.10	47.30	47.40	Temperature coefficient of Isc	0.045%/°C	Front Side Maximum Static Loading	Up to 5400Pa
Short Circuit Current Isc(A)	12.95	12.98	13.02	13.06	13.10	13.14	13.18	Refer.Bifacial Factor	(80±10)%	Rear Side Maximum Static Loading	Up to 2400Pa

\*NMOT: Irradiance 800W/m², Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s

## PACKAGING CONFIGURATION \*

Front power Pmax/W	651	656	662	667	672	677	683	Piece/Box	36
Total power Pmax/W	24.08	24.27	24.47	24.66	24.86	25.07	25.26	Piece/Container(40'HQ)	720
Vmp/V(Total)	713	719	725	730	736	742	748		
Imp/A(Total)	26.37	26.59	26.80	27.01	27.22	27.46	27.67		
Voc/V(Total)	775	781	788	794	800	806	813		
Isc/A(Total)	28.67	28.90	29.13	29.36	29.59	29.85	30.08		

\*Bifacial Gain: The additional gain from the back side compared to the power of the front side at the standard test condition. It depends on mounting (structure, height, tilt angle etc.) and albedo of the ground.

\*Customized packaging is available upon request.

\*Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

\*Caution: Please be kindly advised that PV modules should be handled and installed by qualified people who have professional skills and please carefully read the safety and installation instructions before using our PV modules.